


# CLIMBOO WD1420




3 - 14 years

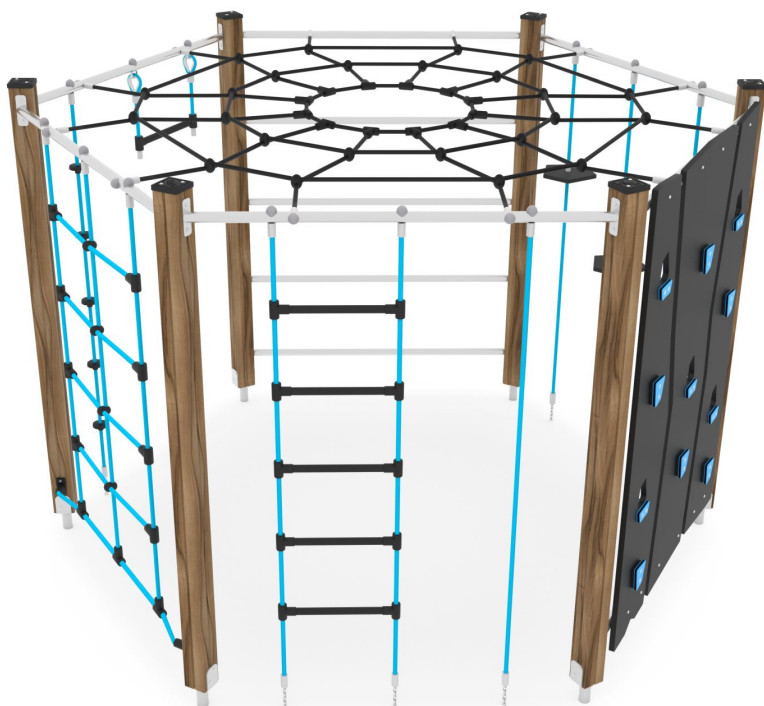

18 kids



31,8 m<sup>2</sup>

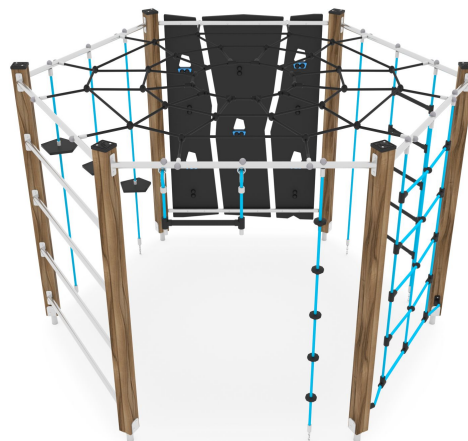

## Material specification

- Construction made of the highest quality laminated, impregnated and double coated pine wood 90 x 90 mm without knots, secured from the top with polypropylene plugs,
- Metal anchors made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and to extend the product's life,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Climbing stones made of durable HDPE plate, resistant to weather conditions,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Ladders made of steel ropes in polypropylene braid and rungs made of synthetic material,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars and handrails,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps made of polypropylene,



**Physical development**



pull-up



passage






climbing





**9**  
number of activity elements

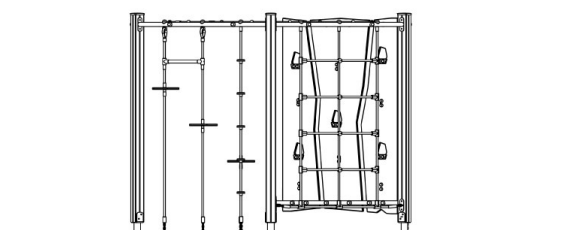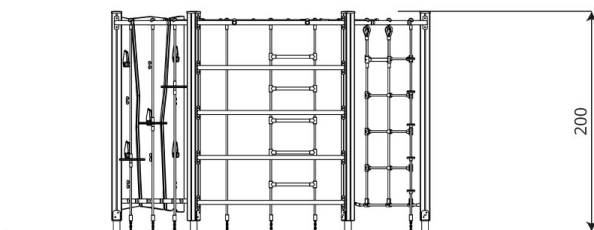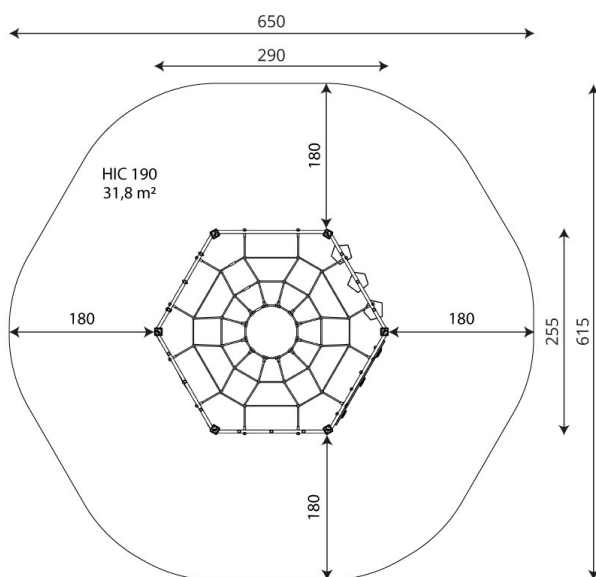

**Product technical sheet**

**CLIMBOO WD1420**

**Product data**

|                                |                     |
|--------------------------------|---------------------|
| Length                         | 290 cm              |
| Width                          | 255 cm              |
| Total height                   | 200 cm              |
| Age group                      | 3 - 14 years        |
| Number of users                | 18 kids             |
| Safety zone                    | 31,8 m <sup>2</sup> |
| Free fall height               | 190 cm              |
| In accordance with norm EN     | 1176-1:2017         |
| Weight of the heaviest part    | 13 kg               |
| Dimensions of the largest part | 265x9x9 cm          |
| Availability of spare parts    | YES                 |
| Installation time              | 6,5 h               |

Color options

Data is subject to change without prior notice.

**Additional information**

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmieing the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

**Guarantee**

**30** 30 year guarantee - Structural strength of steel and stainless steel components

**15** 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10** 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5** 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 190                       |

## Product technical sheet

# CLIMBOO WD1420

### Amount of safe surface corresponding with free fall height:

HIC 190 31,8 m<sup>2</sup>

Data is subject to change without prior notice.

