
product line **BASIC**

SPHERE

300, 400, 500, 600, 700

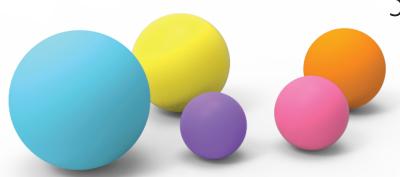

PRODUCT COMPOSITION

EPDM rubber granules, aliphatic PU binder, SBR + LECA mixture

COLOR COMBINATION

Various colors available on request

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

Ø300 – 600mm: safety rubber surface (no safety area required according to EN1177) Ø700mm: safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

certified according to EN1176 complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet, size of pallet according to number of units

STORAGE


in original packaging on a pallet in temperatures between – 40° C and 50° C



R1850

Our products are handmade, please allow dimensional tolerance up to 20 mm













Ø 300 mm Ø 400 mm Ø 500 mm Ø 600 mm

3D PROGRAM, s.r.o.

Objízdná 1911 Otrokovice 765 02 Czech Republic

www.3dprogram.eu info@3dprogram.eu +420 602 500 045 +420 577 700 718



