
PRODUCT SHEET C09/21EN

product line **CLASSIC**



RECOMMENDED SAFETY SURFACE

safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

certified according to EN1176 complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION

the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 1650 x 2100mm

STORAGE

in original packaging on a pallet in temperatures between - 40° C and 50° C

BEE

PRODUCT COMPOSITION


SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell, metal parts

COLOR COMBINATION

standard: yellow / orange - yellow / black (other combination on request)

COLOR STABILITY

UV stable

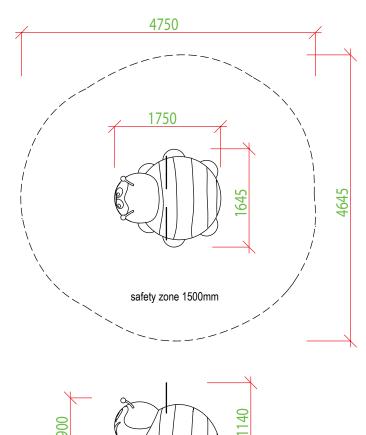





50 kg T1140 mn











Objízdná 1911 Otrokovice 765 02 Czech Republic





