

Product Datasheet

Playset DPZA8001

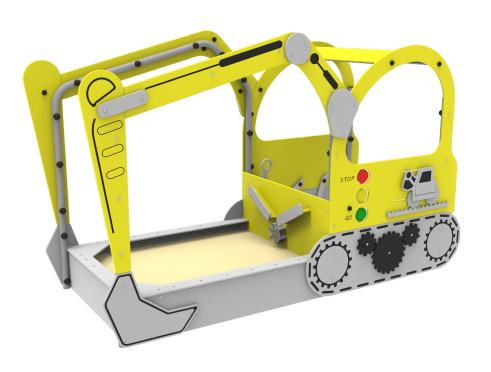


The set contains:

 Excavator with sandbox and 5 movable educational elements - 1 pcs



[m]

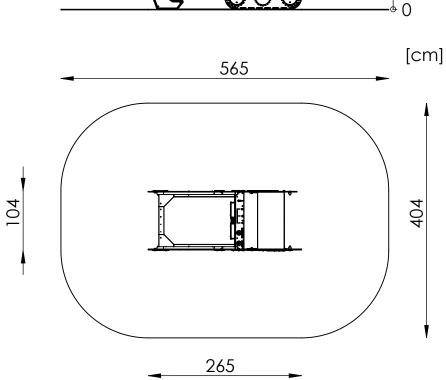

Age: 0+

Safety zone: 565 cm x 404 cm

Safety zone area: 20,8 m²

Free fall height: 60 cm

Spare parts availability: YES

Product compliant with PN-EN 1176-1: YES

Mounting:

The set is mounted in the ground. Foundations made of C20/25 concrete.

In sets containing a slide, pay attention to the location in relation to the directions of the world because the sun heats the slide. The slide should not be mounted to the south.

Acceptable shock absorbing surfaces and their minimum thickness

| Material ^a | Description [mm] | Minimum depth ^b [cm] | Maximum free heights of fall [cm] |
|--------------------------------|--------------------------------|---------------------------------------|-----------------------------------|
| Turf/topsoil | | - | ≤ 100 ^d |
| Bark | 20 to 80 particle size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Woodchip | 5 to 30 particle size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Sand or gravel ^c | 0,25 to 8 grain size | 20 | ≤ 200 |
| | | 30 | ≤ 300 |
| Other materials | As tested according to EN 1177 | | Critical fall height as tested |

^a For further information on specific material properly prepared for use in children's playgrounds ^b For loose particulate material, add 100 mm to the minimum depht to compensate for displacement(see 4.2.8.5.1). ^c Sand and gravel shall be well rounded and washed to eliminate most of the silt of clay particles. Washed sand and grave lis considered to be from alluvial (natural eroded) deposits and free from most sil tor clay particles. For gravel this may commonly be described as 'pea shingle'. Uniformity coefficient D60/D10<3,0 Grain size can be indentified by use of a sieve test, as in EN 933-1(see Annex G)

^d See NOTE 2 in 4.2.8.5.2